
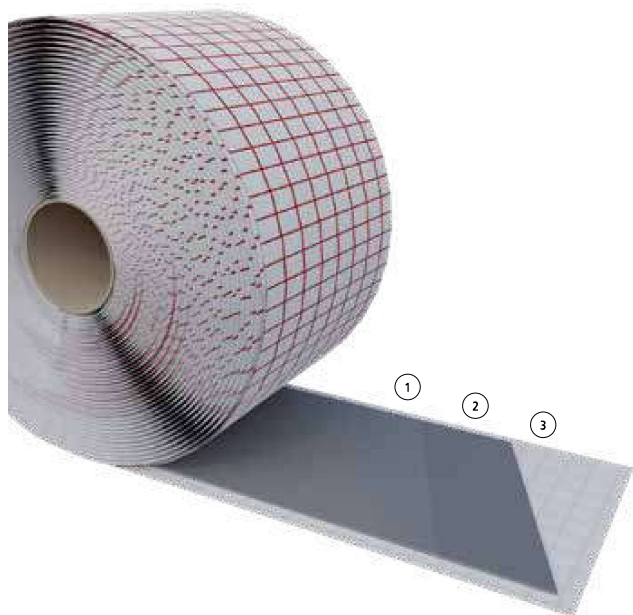


## QUICK OVERVIEW: STRENGTHS

### The semi-flexible for every linear seal

- Monoadhesive butyl band
- Suitable for multiple fields of use thanks to the variety of sizes and thicknesses
- Characterized by butyl glue with a high seal and without solvents, suitable for every laying surface
- Dual use, indoor and outdoor, thanks to the water-resistant surface

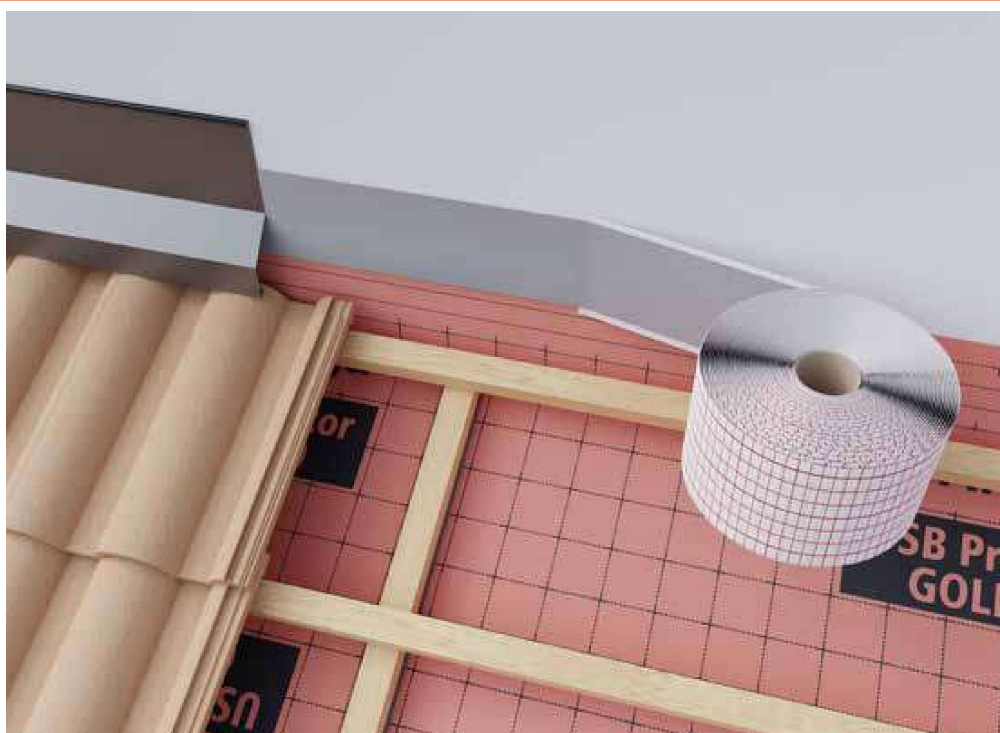

#### Composition:

- ① Polyethylene film
- ② Butylic glue
- ③ Silicone liner

#### Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Coll 50	02044050	50x15	12	30
Coll 80	02044080	80x15	4	30
Coll 150	02044150	150x15	4	30

#### Features:



#### Technical data sheet

Glue		<b>butyl</b>
Glue carrier material		<b>LDPE</b>
Protection liner		<b>YES</b>
Thickness Coll 50 / Coll 150		<b>1,0 mm</b>
Thickness Coll 80		<b>2,0 mm</b>
Specific weight	DIN EN ISO 1183-1	<b>~1,4 g/cm<sup>3</sup></b>
Viscosity	DIN EN ISO 7390	<b>stable</b>
Hardness (Shore 00)	DIN EN ISO 868	<b>~40</b>
Compressive strength	DTU 39.4	<b>&gt;0,04 N/mm<sup>2</sup></b>
Solid content	DIN EN ISO 10563	<b>&gt;99 %</b>
Emissions	Emicode®	<b>very low</b>
Working temperature		<b>+5°C / +30°C</b>
Temperature resistance		<b>-40°C / +100°C</b>
Fire class	DIN 4102	<b>B2</b>
UV stability		<b>3 months*</b>
Storage place		<b>dry, protected from UV rays, ~20°C</b>
Storage period		<b>max. 12 months</b>

\*with reference to the Central European climate  
Riwega Srl is not responsible for negligent and improper use of its products