


Tape 2 AC

QUICK OVERVIEW: STRENGTHS

Double adhesion in one tape

- Double-sided acrylic adhesive tape
- Specific for sealing of the overlaps of vapour control layers and breathable membranes
- High adhesion acrylic glue, solvent free
- Quick and easy to lay
- Adheres to all surfaces building

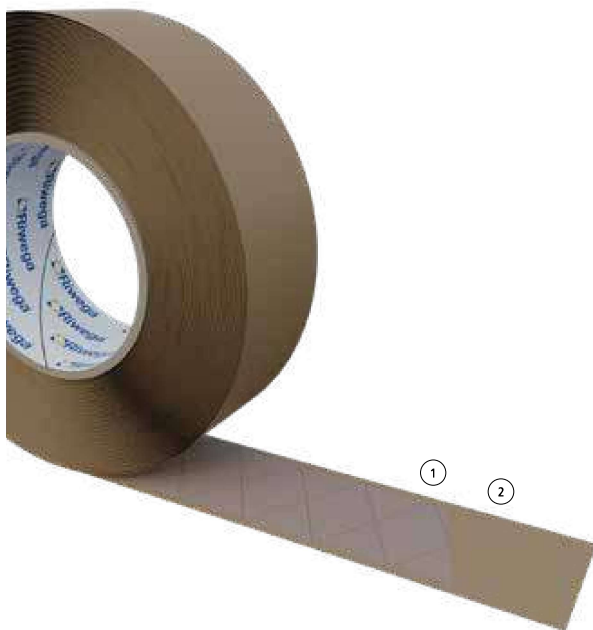

Composition:

- ① Acrylic glue with polyester mesh
- ② Silicone liner

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Tape 2 AC 20	02040220	20x50	12	60
Tape 2 AC 50	02040250	50x50	5	60

Features:



Technical data sheet

Glue		polyacrylate-based disp.
Glue carrier material		-
Reinforcing mesh		YES
Protection liner		YES
Solvents and emollients		NO
Thickness	DIN EN 1942	0,22 - 0,24 mm
Peel adhesion	AFERA 5001	≥25 N/25 mm
Resistance to condensation		high
Resistance to aging		very high
Initial adhesion (Tack)		high
Working temperature		+5°C / +30°C
Temperature resistance		-30°C / +120°C
Storage place		dry, protected from UV rays, +18°C / +25°C
Storage period		max. 24 months