


QUICK OVERVIEW: STRENGTHS

The evergreen among breathable membranes

- Highly breathable, water tight membrane
- Optimized performance, guaranteed for 15 years thanks to the new UV10 Bikom film
- The most popular membrane for watertight pitched roofs
- More than 20 years experience on the market
- Great price/quality ratio

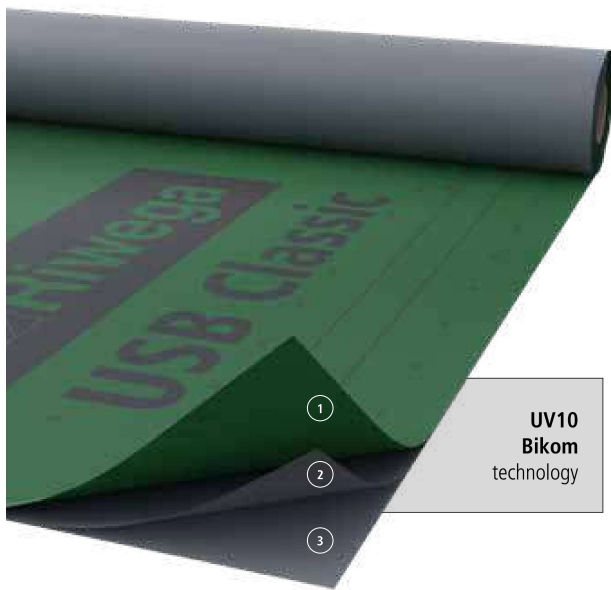

Composition:

- ① Protective UV stabilized, water repellent layer in PP
- ② Film UV10 Bikom, monolithic, elastic
- ③ Protective layer in PP

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m ²)
02010160	02020161	1,5	50	1500
020101600	020201610	3,0	50	3000

Features:



Classification:



Technical data sheet

Material	PP-composite	
Film	UV10 Bikom	
Colour	Green	
Use underneath PV panels	NO	
Mass per unit area	EN 1849-2	185 g/m ²
Thickness		0,89 mm
Sd value	EN ISO 12572	0,07 m
Water vapour permeability	EN ISO 12572	~ 500 g/m ² /24 h
Watern column	EN 20811	>400 cm
Heavy rain test	TU Berlin	passed
Resistance to water passage	EN 1928 (Met. A)	W1
Tensile strength MD/CD*	EN 12311-1	350 / 260 N/50mm
Elongation MD/CD*	EN 12311-1	60 / 80 %
Tear resistance MD/CD*	EN 12310-1	200 / 240 N
Fire reaction class	EN 13501-1	E
UV stability		6 months
Temperature resistance		-40°/+100°C

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products