
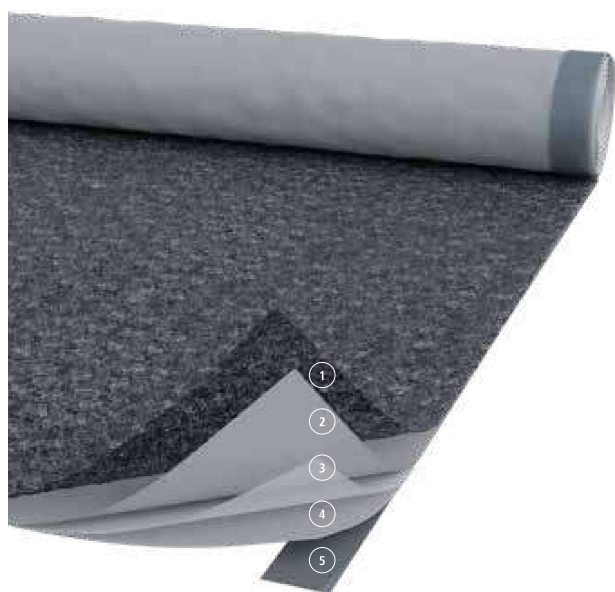


USB Drenlam Diff Top SK

QUICK OVERVIEW: STRENGTHS

stops noise and condensation

- Separation layer for metal roofs
- Unique because of the double integrated adhesive tape (TOP SK)
- Guarantees an optimal microventilation for the evacuation of condensate
- 100% virgin PP (non-recycled) for guaranteed extended durability

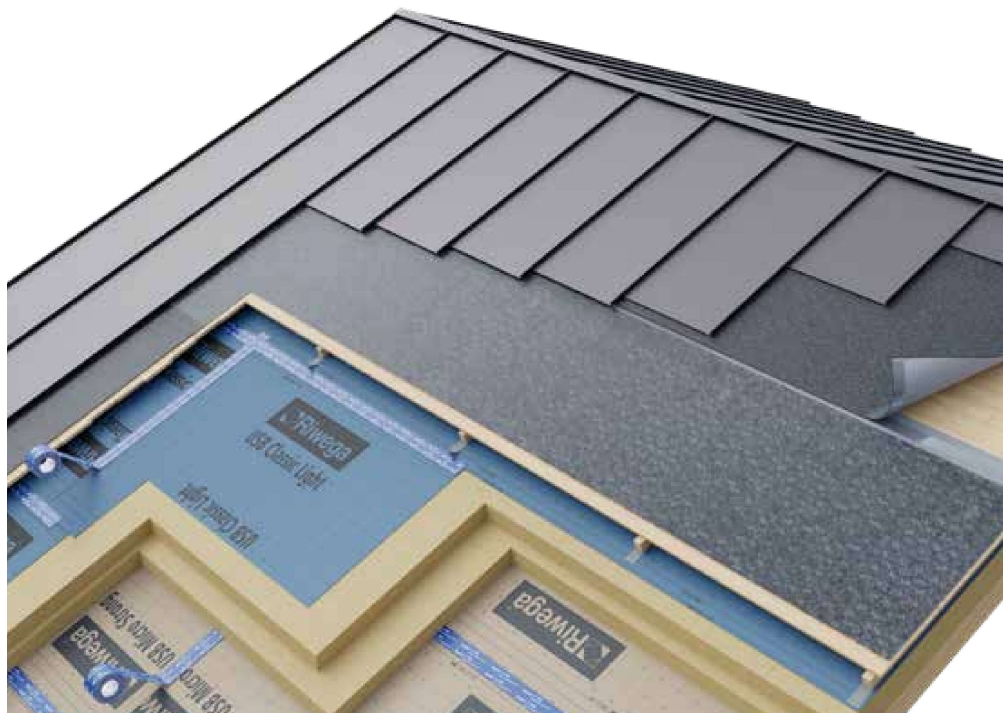

Composition:

- ① Three-dimensional netting in PP with carbon black
- ② Protective UV stabilized, water repellent layer in PP
- ③ Functional film in PP
- ④ Protective layer in PP
- ⑤ Silicone liner

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m ²)
-	02064011	1,5	24	324

Features:



Classification:



Technical data sheet

Material	PP, 3 strati + PP with carbon black	
Film	PP	
Colour	Black/Grey	
Use underneath PV panels	NO	
Mass per unit area	EN 1849-2	500 (150+350) g/m ²
Thickness		8,75 (0,75+8) mm
Sd value	EN ISO 12572	0,02 m
Water vapour permeability	EN ISO 12572	~ 1000 g/m ² /24 h
Watern column	EN 20811	>200 cm
Heavy rain test	TU Berlin	passed
Resistance to water passage	EN 1928 (Met. A)	W1
Tensile strength MD/CD*	EN 12311-1	300 / 190 N/50mm
Elongation MD/CD*	EN 12311-1	60 / 70 %
Tear resistance MD/CD*	EN 12310-1	150 / 190 N
Void ratio		min. 95 %
Noise reduction	EN ISO 712-2	ΔLW 28
Fire reaction class	EN 13501-1	E
UV stability		3 months
Temperature resistance		-40°/+90°C

*MD = longitudinal CD = transversal
Riwega Srl is not responsible for negligent and improper use of its products