



VSK Classic Light self-adhesive

QUICK OVERVIEW: STRENGTHS

The self-adhesive breathable membrane

- Highly breathable, waterproof membrane, adhesive over the entire surface
- Protection of walls, floors and roofs under construction
- External protection on wood - concrete wall connection
- Acrylic dispersion based adhesive

Technical data sheet

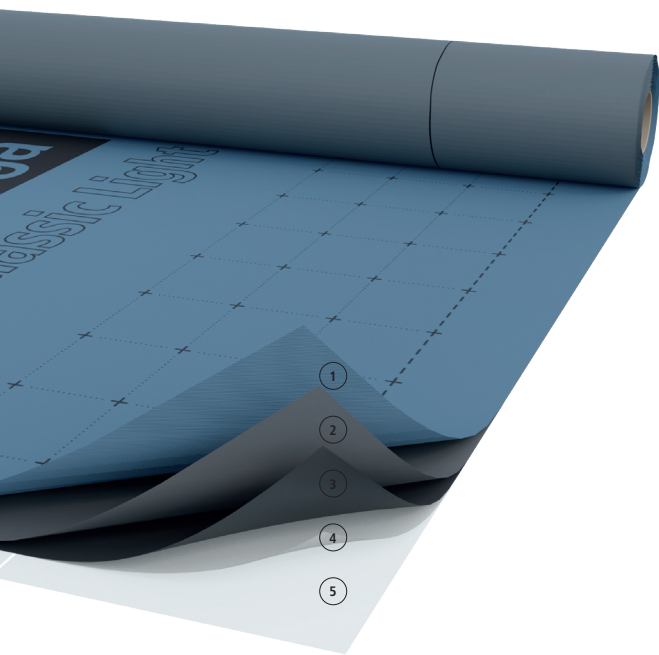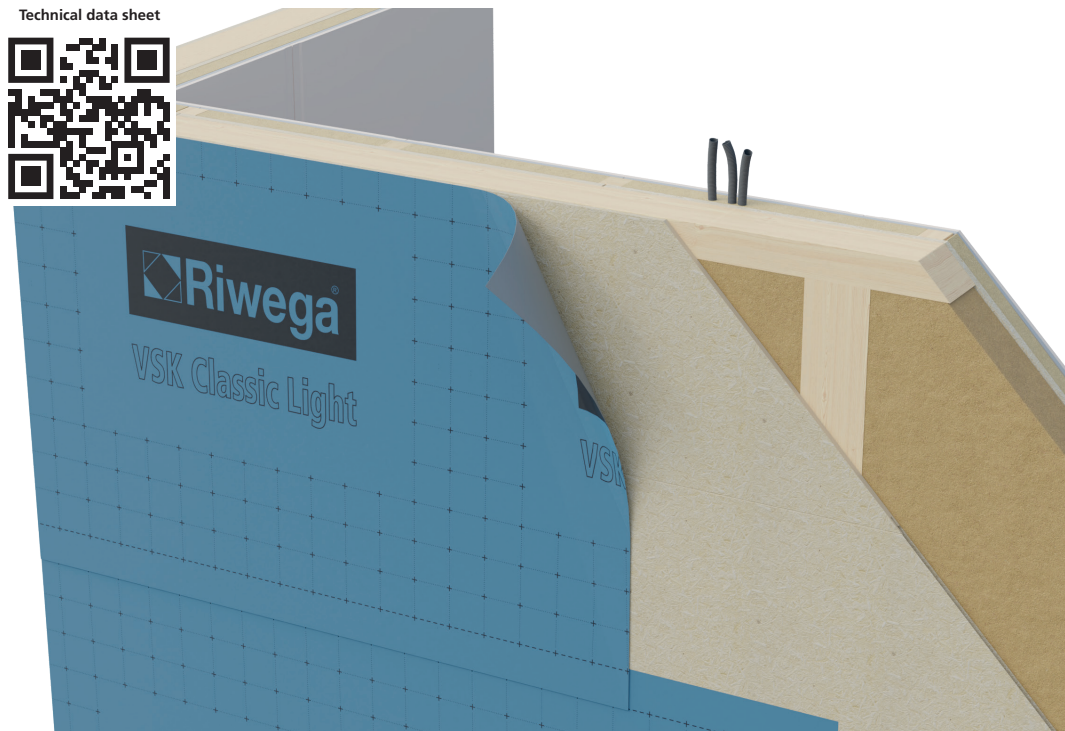

Features:



Classification:



Composition:

- ① Protective UV stabilized, water repellent layer in PP
- ② Film UV10 Bikom, monolithic, elastic
- ③ Protective layer in PP
- ④ Pure acrylic adhesive modified
- ⑤ Re-cut liner 25/125 cm

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m ²)
02065010	-	1,5	30	900

Technical data sheet

Material	PP-composite	
Film	UV10 Bikom	
Colour	Light blue	
Use underneath PV panels	NO	
Mass per unit area	EN 1849-2	255 g/m ²
Glue	disp. based polyacrylate	
Glue weight	100 g/m ²	
Pre-cutted liner	125 + 25 cm	
Sd value	EN ISO 12572	0,20 m
Water vapour permeability	EN ISO 12572	~ 100 g/m ² /24 h
Watern column	EN 20811	>400 cm
Resistance to water passage	EN 1928 (Met. A)	W1
Tensile strength MD/CD*	EN 12311-1	290 / 225 N50 mm
Elongation MD/CD*	EN 12311-1	65 / 90 %
Tear resistance MD/CD*	EN 12310-1	170 / 200 N
Fire reaction class	EN 13501-1	E
UV stability	6 months	
Temperature resistance	-40°/+100°C	
Working temperature	+5°/+40°C	

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products